



SELF-CONTAINED METER SOCKET CONNECTIONS

OVERHEAD ONLY




120/240 VOLT
3 WIRE
SINGLE-PHASE
100 AND 200 AMP.

UNDERGROUND ONLY




120/240 VOLT
3 WIRE
SINGLE-PHASE
200 AMP.

UNDERGROUND




120/240 VOLT
3 WIRE
SINGLE-PHASE
320 AMP.

OVERHEAD

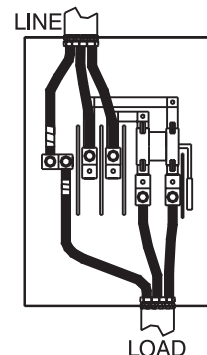


120/240 VOLT
3 WIRE
SINGLE-PHASE
320 AMP.

OVERHEAD ONLY



120/208 VOLT
3 WIRE
SINGLE-PHASE
100 AND 200 AMP.


UNDERGROUND ONLY



120/208 VOLT
3 WIRE
SINGLE-PHASE
(NETWORK)
200 AMP

120/208 VOLT SINGLE-PHASE
(NETWORK) METER SOCKETS
REQUIRE FIFTH TERMINAL (JAW)
MOUNTED IN 9 O'CLOCK POSITION

OVERHEAD ONLY




208Y/120 VOLT
240/120 VOLT*
480Y/277 VOLT†
4 WIRE
THREE-PHASE
200 AMP.

* PUT HIGH PHASE OF 240/120
VOLT DELTA ON RIGHT JAW OF
METER SOCKET.

† SEE FIGURES 42 AND 43 FOR
480Y/277 VOLT INSTALLATIONS.

UNDERGROUND
OR OVERHEAD



208Y/120 VOLT
240/120 VOLT*
480Y/277 VOLT†
4 WIRE
THREE-PHASE
320 AMP.

NOTES:

1. ALL METER SOCKETS SHALL BE RINGLESS-TYPE AND SUITABLE FOR PLUG-IN METERS.
2. **INHIBITOR COMPOUND** SHALL BE USED ON ALL ALUMINUM WIRE TERMINATIONS.