


TYPICAL TRANSFORMER-RATED METERING INSTALLATION AT PAD-MOUNTED TRANSFORMER (3-PHASE, 4-WIRE SERVICE)

CONSULT COMPANY FOR DETAILS BEFORE INSTALLATION.

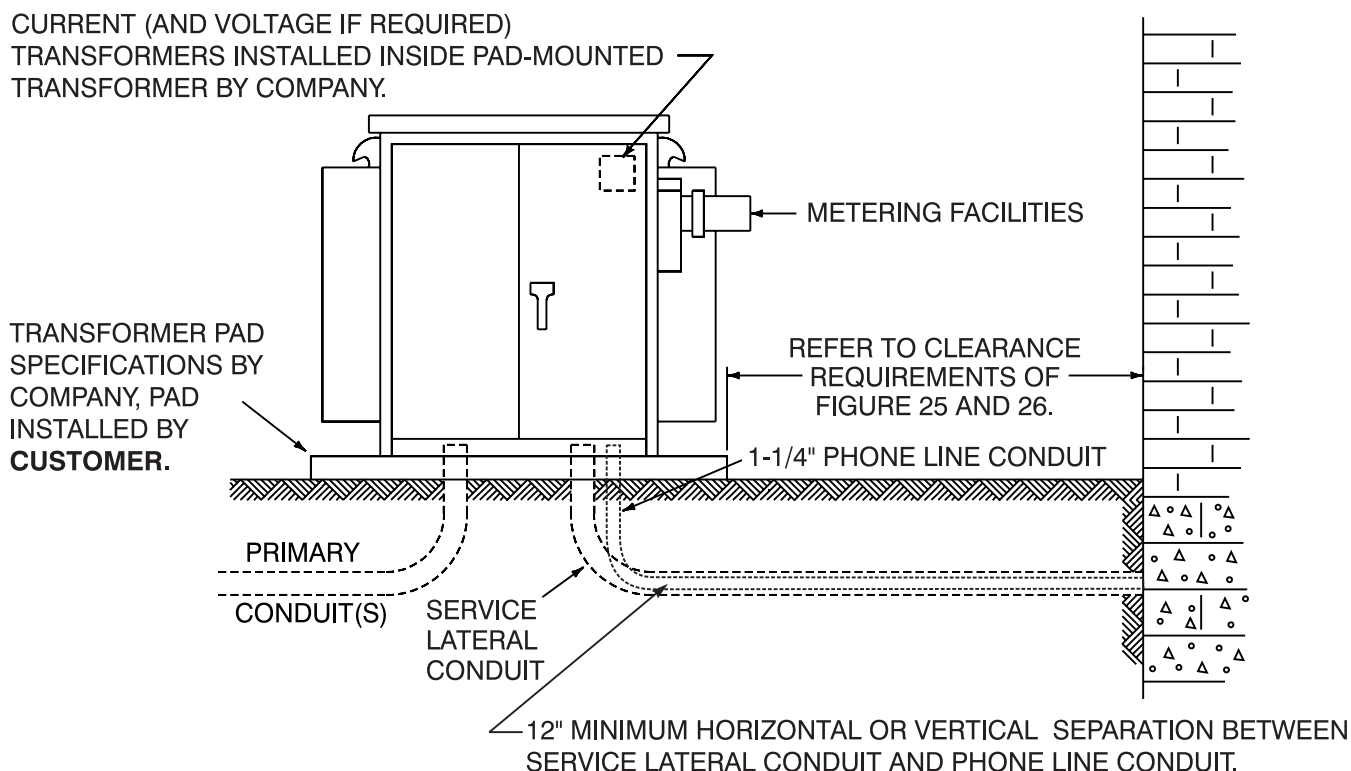

NOTES:

1. FOR METERING LOCATED AT PAD-MOUNTED TRANSFORMER, SERVICE LATERAL SHALL BE FURNISHED, INSTALLED, OWNED AND MAINTAINED BY **CUSTOMER** (SEE SECTION 6.03). IN ADDITION TO SERVICE LATERAL CONDUIT, CUSTOMER SHALL FURNISH AND INSTALL 1-1/4" DIAMETER CONDUIT WITH 1/4" NYLON PULL ROPE FROM SECONDARY COMPARTMENT OF PAD-MOUNTED TRANSFORMER TO LOCATION AT CUSTOMER'S BUILDING WHERE TELEPHONE LINE SERVICE CAN BE MADE AVAILABLE AT THE TELEPHONE DEMARCATION POINT (SEE SECTION 8.08).
2. TRENCHING AND BACKFILLING SHALL BE DONE BY THE **CUSTOMER**.
3. SERVICE LATERAL INSTALLED IN CONDUIT SHALL BE INSTALLED AS A-B-C-N IN EACH CONDUIT.
4. CONDUIT SHALL HAVE WEEP HOLES AT GROUND LINE WHEN REQUIRED.
5. COMPANY WILL PROVIDE ALL CONNECTORS AND MAKE ALL CONNECTIONS AT TRANSFORMER.
6. **CUSTOMER** SHALL GIVE COMPANY ADEQUATE ADVANCE NOTICE AS TO NUMBER AND SIZE OF CONDUCTORS CUSTOMER WILL INSTALL.
7. BARRIERS MAY BE REQUIRED BY COMPANY FOR PROTECTION OF TRANSFORMER FROM VEHICULAR DAMAGE.